





Coders

Models CDR-3 (PSNI)

MTM-1 (March Time)

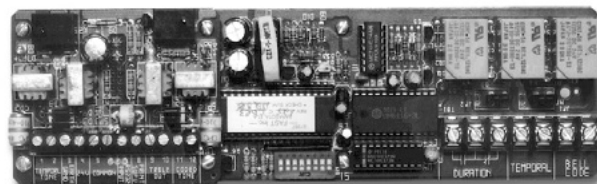

CDR-3, PSNI

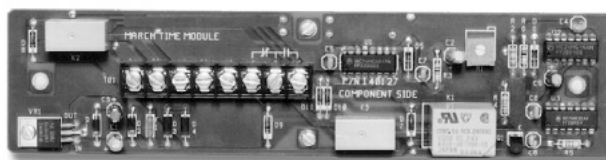

MTM-1, March Time



Overview

CDR-3

The CDR-3 Coder is a microprocessor based system option module that provides audio and dry contact coded outputs. The coder activates in response to alarm information received over a supervised RS-232 communications circuit from a fire alarm panel output port.

The CDR-3 provides five LED status indicators. The module is supervised for loss of RS-232 communications from the host panel. Should communications be lost, the module will enter the fail-safe mode and automatically send a temporal signal from the coder outputs. The supervised PSNI and temporal tone outputs also transmit supervisory tones for circuit supervision. Loss of 24 VDC power, and microprocessor failures are also supervised. Module failure indication is provided with a dry relay contact.

MTM-1, March Time

The March Time Coder provides March Time, Morse "S", or Morse "U" codes. The on board generated code is selected by contact closure or terminal block jumper configurations. The output is provided through Form C dry contacts. The MTM is activated by applying power through a contact closure, such as the common alarm contact closure from the power supply on the 24 VDC system power supply.

Standard Features

CDR-3

- Microprocessor controlled
- RS-232 Input
- 1,000,000 code possibilities
- Active supervision of RS-232 port
- Positive Successive Non-Interfering
- Trouble output for coder failure
- 2, 3, or 4 digit code selection
- 4-Code output: 2 Tone, 2 dry contact
- Tone codes: PSNI and March Time or Temporal
- Dry Contact code outputs: PSNI and March Time or Temporal
- Low Current
- Fail Safe operation mode
- Dip Switch Selectable operating modes
- Mounts in cabinet in 1/2 size footprint space

MTM-1, March Time

- Three input selectable codes
- Low current
- Form C relay contacts out
- Mounts in cabinet in 1/2 size footprint space

Specifications

	CDR-3, PSNI	MTM-1, March Time
Input Voltage	24Vdc	24Vdc
Contact Ratings	30 Vdc @ 4 Amps (pf. 35) 25 Vrms @ 100 Watts 70 Vrms @ 100 Watts	30 Vdc @ 4 Adc (pf. 35)
Standby Current	60 mA	N/A
Active Current	100 mA	30 mA
Tone Outputs (isolated) Output Impedance Output Voltage EOL	1.2K Ohm 3.5VRMS 10K Ohm	N/A
Coded Output Code Format Extended Range Format Number of different codes	4 or 6 rounds, 1-4 digits, each digit 1-9 (1-35 on EST3 only) 4 rounds, 1-3 digits, 1 digit 1-15 and 2 digits 1-9 1,000,000	N/A
March Time Output	60 or 90 Beats Per Minute (configurable)	60 Beats Per Minute
RS-232 Baud Rate	600, 1200, 2400, or 4800	N/A
Environment	32°F - 120°F (0°C - 49°C) 93% RH, Non-condensing	
Listings	ULI, FM, ULC, CSFM	

Ordering Information

Model	Description
CDR-3	PSNI Coder Module
MTM-1	March Time Coder Module
EXR	Polarized Coder Relay
ARM-8	Auxiliary Relay Module
ARA-1	Auxiliary Relay



Detection & alarm since 1872

U.S.

T 888-378-2329

F 866-503-3996

Canada

Chubb Edwards

T 519 376 2430

F 519 376 7258

Southeast Asia

T : +65 6391 9300

F : +65 6391 9306

India

T : +91 80 4344 2000

F : +91 80 4344 2050

Australia

T +61 3 9239 1200

F +61 3 9239 1299

Europe

T +32 2 725 11 20

F +32 2 721 86 13

Latin America

T 305 593 4301

F 305 593 4300

utcfireandsecurity.com

© 2010 UTC Fire & Security.

All rights reserved.
